

MEB210 Series

Lightweight Underwater Accelerometer, Top Exit Molded Integral Cable, 10-32 Mounting, 100 mV/g, ±10%



VIBRATION ANALYSIS HARDWARE




Product Features

- ▶ Nylon Overmolded Accelerometer
- ▶ IP68 Rated
- ▶ Low Cost

MEB210

CB127 Integral Cable


Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common



Stock Product

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	MEB210	M/MEB210	Environmental		
Sensitivity (±10%)		100 mV/g	Temperature Range	-58 to 250°F	-50 to 121°C
Frequency Response (±3dB)	30-900,000 CPM	0.5 Hz-15 kHz	Maximum Shock Protection		10,000 g, peak
Frequency Response (±10%)	60-600,000 CPM	1 Hz-10 kHz	Electromagnetic Sensitivity		CE Approved
Dynamic Range		± 50g, peak	Sealing		IP68 Integrally Molded Cable
Electrical			Submersible Depth	200 ft.	61 m
Settling Time		< 2 Seconds	Physical		
Voltage Source (IEPE)		18-30 VDC	Sensing Element		PZT Ceramic
Constant Current Excitation		2-10 mA	Sensing Structure		Shear Mode
Spectral Noise @ 10 Hz		30 µg/√Hz	Weight	0.35 oz	10 grams
Spectral Noise @ 100 Hz		4 µg/√Hz	Mounting Base		316L Stainless Steel
Spectral Noise @ 1000 Hz		2 µg/√Hz	Mounting		10-32 UNF
Output Impedance		< 100 ohm	Cable Jacket Diameter		0.14 in (3.6 mm)
Bias Output Voltage		10-14 VDC	Cable Jacket Material		Polyurethane
Case Isolation		>10 ⁸ ohm	Cable Conductor		26 AWG Twisted Shielded Pair
			Resonant Frequency	2,640,000 CPM	44 kHz
			Mounting Torque	1.5 - 2.5 ft. lbs	2.0 to 3.4 Nm
			Mounting Hardware	10-32 Stud	M5 Stud
			Calibration Certificate		CA10

Typical Frequency Response

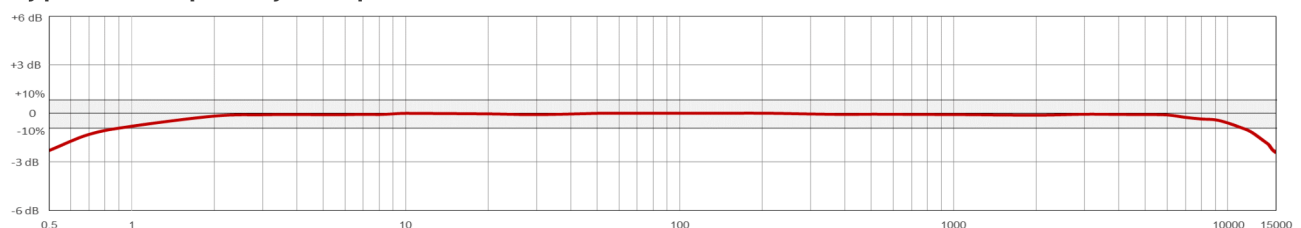

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900