

VE135 Series

Piezo Velocity Sensor, Top Exit 2 Pin Connector, 500 mV/in/sec, ±10%



VIBRATION ANALYSIS HARDWARE




Product Features

- 500 mV/in/sec (20 mV/mm/sec) Sensitivity
- 1,0-10000 Hz (60-600,000 CPM) Frequency Response
- ▶ ±10 in/sec, Peak Dynamic Range
- ▶ 2 Pin MIL Connection or Integral Option
- ▶ Integrates to Velocity in the Sensor

VE135-1A 2 Pin Connector	VE135-2C Integral Cable	VE135-3C Armored Integral Cable	VE135-6C Heavy Duty Armored Integral Cable																														
<table border="1"> <tr><th>Connector Pin</th><th>Polarity</th></tr> <tr><td>A</td><td>(+) Signal/Power</td></tr> <tr><td>B</td><td>(-) Common</td></tr> </table> <p>Stock Product</p>	Connector Pin	Polarity	A	(+) Signal/Power	B	(-) Common	<table border="1"> <tr><th>Conductor</th><th>Polarity</th></tr> <tr><td>Red</td><td>(+) Signal/Power</td></tr> <tr><td>Black</td><td>(-) Common</td></tr> <tr><td>Shield</td><td>Cable Drain Wire</td></tr> </table> <p>Built To Order</p>	Conductor	Polarity	Red	(+) Signal/Power	Black	(-) Common	Shield	Cable Drain Wire	<table border="1"> <tr><th>Conductor</th><th>Polarity</th></tr> <tr><td>Red</td><td>(+) Signal/Power</td></tr> <tr><td>Black</td><td>(-) Common</td></tr> <tr><td>Shield</td><td>Cable Drain Wire</td></tr> </table> <p>Built To Order</p>	Conductor	Polarity	Red	(+) Signal/Power	Black	(-) Common	Shield	Cable Drain Wire	<table border="1"> <tr><th>Conductor</th><th>Polarity</th></tr> <tr><td>Red</td><td>(+) Signal/Power</td></tr> <tr><td>Black</td><td>(-) Common</td></tr> <tr><td>Shield</td><td>Cable Drain Wire</td></tr> </table> <p>Built To Order</p>	Conductor	Polarity	Red	(+) Signal/Power	Black	(-) Common	Shield	Cable Drain Wire
Connector Pin	Polarity																																
A	(+) Signal/Power																																
B	(-) Common																																
Conductor	Polarity																																
Red	(+) Signal/Power																																
Black	(-) Common																																
Shield	Cable Drain Wire																																
Conductor	Polarity																																
Red	(+) Signal/Power																																
Black	(-) Common																																
Shield	Cable Drain Wire																																
Conductor	Polarity																																
Red	(+) Signal/Power																																
Black	(-) Common																																
Shield	Cable Drain Wire																																

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	VE135	M/VE135	Environmental		
Sensitivity (±10%)	500 mV/in/sec		Temperature Range	-58 to 250°F	-50 to 121°C
Frequency Response (±3dB)	60-600,000 CPM	1,0-10000 Hz	Maximum Shock Protection	5,000 g, peak	
Frequency Response (±10%)	120-300,000 CPM	2,0-5000 Hz	Electromagnetic Sensitivity	CE	
Dynamic Range	± 10 in/sec. pk		Sealing	Welded, Hermetic	
Electrical			Submersible Depth	200 ft.	60 m
Settling Time	<4 Seconds		Physical		
Voltage Source (IEPE)	18-30 VDC		Sensing Element	PZT Ceramic	
Constant Current Excitation	2-10 mA		Sensing Structure	Shear Mode	
Spectral Noise @ 10 Hz	200 μ IPS/√Hz		Weight	3.2 oz	90 grams
Spectral Noise @ 100 Hz	6 μ IPS/√Hz		Case Material	316L Stainless Steel	
Spectral Noise @ 1000 Hz	0.7 μ IPS/√Hz		Mounting	1/4-28	
Output Impedance	<100 ohm		Connector (Non-Integral)	2 Pin MIL-C-5015	
Bias Output Voltage	10-14 VDC		Resonant Frequency	1,320,000 CPM	22000 Hz
Case Isolation	>10 ⁸ ohm		Mounting Torque	2 to 5 ft. lbs	2,7 to 6,8 Nm
			Mounting Hardware	1/4-28 Stud	M6x1 Adapter Stud
			Calibration Certificate	CA10	

Typical Frequency Response

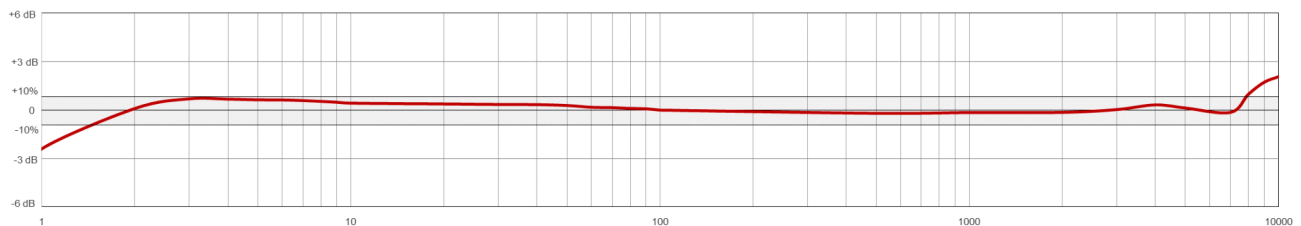

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900