

TA204-M12A Series



VIBRATION ANALYSIS HARDWARE

Dual Output Sensor, Temperature & Acceleration, Side Exit 4 Pin M12 Connector, 100 mV/g, 10 mV/°C, ±10%




Product Features

- Temperature Output 10 mV/°C
- High Performance in a Low Cost Sensor
- ▶ 4 Pin M12 Connection
- ▶ Temperature and Acceleration in One Sensor
- ▶ Requires Multi-Conductor Cable

TA204-M12A

4 Pin Connector


Connector Pin	Polarity
1	(+) Signal/Power
2	(-) Common
3	Not Used
4	(+) Temperature Voltage



Stock Product

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	TA204-M12A		Environmental		
Sensitivity (±10%)		100 mV/g	Temperature Range	-40 to 250°F	-40 to 121°C
Frequency Response (±3dB)	30-600,000 CPM	0.5-10000 Hz	Maximum Shock Protection		5,000 g, peak
Frequency Response (±10%)	120-300,000 CPM	2.0-5000 Hz	Electromagnetic Sensitivity		CE
Dynamic Range		± 80 g, peak	Sealing		IP68
Temperature Measurement Range	-40 to 250°F	-40 to 121°C	Submersible Depth	200 ft.	60 m
Temperature Output		10 mV/°C	Physical		
Temperature Sensor		750 mV = 25 °C (±1)	Sensing Element		PZT Ceramic
Electrical			Sensing Structure		Shear Mode
Settling Time		<2.5 seconds	Weight	5.6 oz	160 grams
Voltage Source (IEPE)		18-30 VDC	Case Material		316L Stainless Steel
Constant Current Excitation		2-10 mA	Mounting		1/4-28
Spectral Noise @ 10 Hz		14 µg/√Hz	Connector (Non-Integral)		4 Pin M12
Spectral Noise @ 100 Hz		2.3 µg/√Hz	Resonant Frequency	1,260,000 CPM	21000 Hz
Spectral Noise @ 1000 Hz		2 µg/√Hz	Mounting Torque	2 to 5 ft. lbs.	2.7 to 6.8 Nm
Output Impedance		<100 ohm	Mounting Hardware	1/4-28 Captive Bolt	M6x1 Captive Bolt
Bias Output Voltage		10-14 VDC	Calibration Certificate		CA10
Case Isolation		>10 ⁸ ohm			

Typical Frequency Response

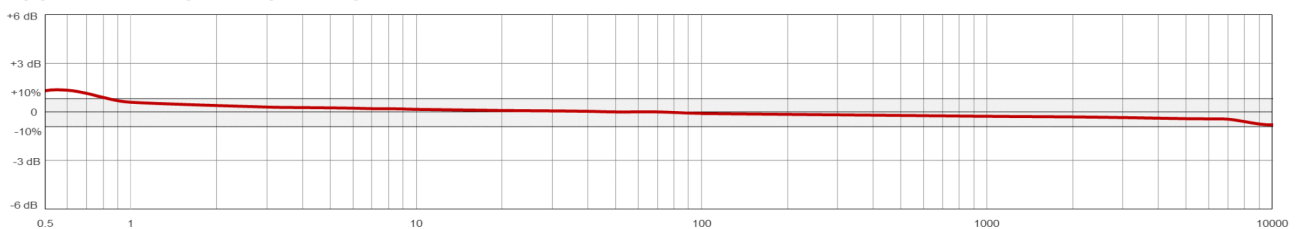

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900