


# TRCA330 Series



VIBRATION ANALYSIS HARDWARE

Miniature Industrial Triaxial Accelerometer, Side Exit 4 Pin Mini-MIL Connector, Follows Cartesian Phase Coordinate System, 10 mV/g, ±10%



## Product Features

Uses J4A, J4C, or J4N Connectors and CB105, CB117, CB119, or CB218 Cables


Cartesian Coordinate Phase Configuration

- ▶ 10 mV/g, ±10% sensitivity tolerance
- ▶ Low Profile Side Exit Case
- ▶ High Frequency Response

### TRCA330

4 Pin Connector

Connector Pin	Polarity
A (Axis Y)	(+) Signal/Power
B (Axis X)	(+) Signal/Power
C (Axis Z)	(+) Signal/Power
D	(-) Common/Grid




Stock Product

### TRCA430

Integral Cable

Conductor	Polarity
Red (Axis Y)	(+) Signal/Power
Green (Axis X)	(+) Signal/Power
White (Axis Z)	(+) Signal/Power
Black	(-) Common/Grid




Built To Order

### TRCA530

Armored Integral Cable


Conductor	Polarity
Red (Axis Y)	(+) Signal/Power
Green (Axis X)	(+) Signal/Power
White (Axis Z)	(+) Signal/Power
Black	(-) Common/Grid



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	TRCA330	M/TRCA330	<b>Environmental</b>		
Sensitivity (±10%)		10 mV/g	Temperature Range	-65 to 250°F	-54 to 121°C
Frequency Response (±3dB)	30-900,000 CPM	0.5 Hz-15 kHz	Maximum Shock Protection		10,000 g, peak
Frequency Response (±10%)	60-480,000 CPM	1 Hz-8 kHz	Electromagnetic Sensitivity		CE
Frequency Response (±5%)	480-330,000 CPM	8 Hz-5.5 kHz	Sealing		Welded, Hermetic
Dynamic Range		±500g, peak	Submersible Depth	200 ft.	60 m
<b>Electrical</b>			SIL Rating		SIL 2
Settling Time		<2.5 Seconds	<b>Physical</b>		
Voltage Source (IEPE)		18-30 VDC	Sensing Element		PZT Ceramic
Constant Current Excitation		2-10 mA	Sensing Structure		Shear Mode
Spectral Noise @ 10 Hz		100 µg/√Hz	Weight	3.9 oz	110 grams
Spectral Noise @ 100 Hz		19 µg/√Hz	Case Material		316L Stainless Steel
Spectral Noise @ 1000 Hz		5 µg/√Hz	Mounting		1/4-28
Output Impedance		<100 ohm	Connector (Non-Integral)		4 Pin
Bias Output Voltage		10-14 VDC	Resonant Frequency	2,640,000 CPM	44 kHz
Case Isolation		>10 <sup>8</sup> ohm	Mounting Torque		1 to 2 ft. lbs. 1,4 to 2,7 Nm
			Mounting Hardware	1/4-28 Captive Bolt	M6x1 Captive Bolt
			Calibration Certificate		CA10

## Typical Frequency Response

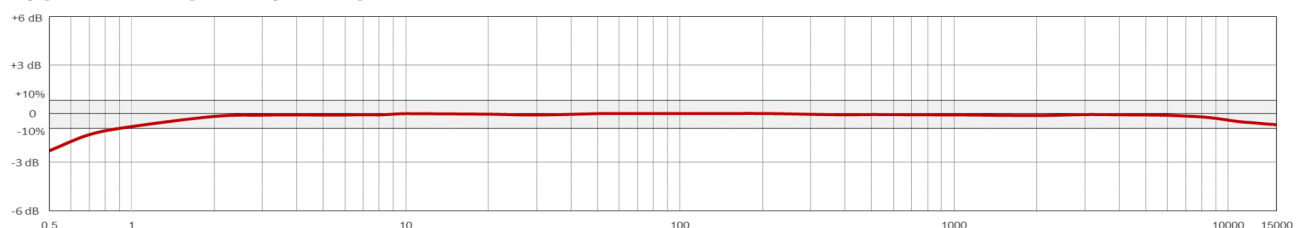

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900